



RECYFIX®POINT

RECYFIX®POINT 30/30, Point drainage, class C 250, with foul air trap, mud bucket and KG-pipe connection DN/OD 110, DN/OD 160, Construction height 300 mm with longitudinal ductile iron grating, bar distance 8 mm, screwed, black, KTL-coated

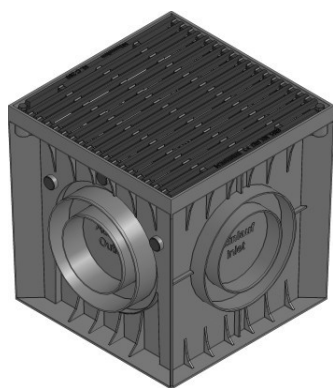

C 250

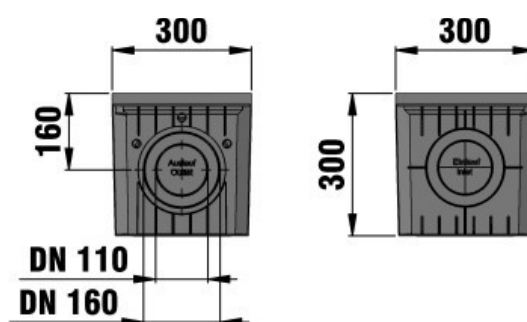

■ Technical data:

Length mm	Width mm	Height mm	Weight kg	Item-no.
300	300	300	6,893	32612

■ Product description:

RECYFIX POINT 30/30 - point drainage, installation height 300 mm, made of modified PP, with longitudinal ductile iron grating bar distance 8 mm, KTL-coated, loading capacity from A 15 to C 250, screwed, with sludge trap bucket and foul air trap, with lateral connection possibility DN/OD 110/160, L/W/H 300x300x300 mm, item no. 32612

■ Material:


- **Channel body:**

■ Set of rules:

in Anlehnung an EN 1433

■ Application areas:

- Gardening and landscaping
- Yard gullies

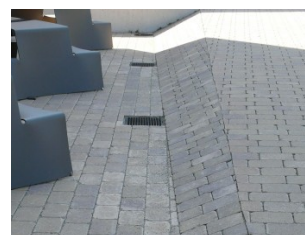

The optimal use of the product in the aforementioned applications depends on various factors (positioning, traffic load and frequency,...). Our experts will be happy to advise you!