

Illustrated: DGHTOD4/6060/KH



## Highway

### D400 & HA104/09 Group-3 Gully Grates - Three Flanged

Designed and manufactured to exceed the enhanced requirements of Highways England's HA 104/09 specification. The Highway range of access covers and gully grates conforms to BS EN 124 and also includes patented safety provisions and design features to ensure safe and robust performance.



Illustrated: DGHTOD4/4242/KHA  
DGHTOD6/4242/KHA



Illustrated: DGHTOD4/4337/KHA  
DGHTOD6/4337/KHA



Illustrated: DGHTOD4/6045/KH




Illustrated: DGHTOD4/1045/KH

#### Available options:

- Locked
- Anti-slip Coating (60+ PSRV)

1. Wrekin Products Ltd is continually seeking to improve our products and therefore reserves the right to alter product specifications without prior notice. It is the responsibility of all users to satisfy themselves the above data is current.
2. Installation details are available on request.
3. Published September 2016 - Version 1.AC



WREKIN PRODUCTS STOCK CODE	ITEM DESCRIPTION	CLEAR AREA (C x Dmm)	BASE OPENING (F x Gmm)	OVERALL FRAME (A x B mm)	FRAME DEPTH (E mm)	WATERWAY (cm <sup>2</sup> )
DGHTOD4/4242/KHA	425 x 425 x 100mm Double Tri Gully, Group 3	425 x 425	450 x 450	560 x 520	100	1200
DGHTOD6/4242/KHA	425 x 425 x 150mm Double Tri Gully, Group 3	425 x 425	450 x 450	560 x 520	150	1200
DGHTOD4/4337/KHA	430 x 370 x 100mm Double Tri Gully, Group 3	430 x 370	450 x 390	520 x 520	100	990
DGHTOD6/4337/KHA	430 x 370 x 150mm Double Tri Gully, Group 3	430 x 370	450 x 390	520 x 520	150	990
DGHTOD4/6045/KH	600 x 450 x 100mm Double Tri Gully, Group 3	425 x 425	600 x 450	775 x 545	100	1740
DGHTOD6/6045/KH	600 x 450 x 150mm Double Tri Gully, Group 3	425 x 425	600 x 450	775 x 545	150	1740
DGHTOD4/6060/KH	600 x 600 x 100mm Double Tri Gully, Group 3	580 x 580	600 x 600	775 x 695	100	2060
DGHTOD6/6060/KH	600 x 600 x 150mm Double Tri Gully, Group 3	580 x 580	600 x 600	775 x 695	150	2060
DGHTOD4/1045/KH	1000 x 450 x 100mm Double Tri Gully, Group 3	980 x 425	1000 x 450	1175 x 545	100	2810
DGHTOD6/1045/KH	1000 x 450 x 150mm Double Tri Gully, Group 3	980 x 425	1000 x 450	1175 x 545	150	2810

Dimensions:

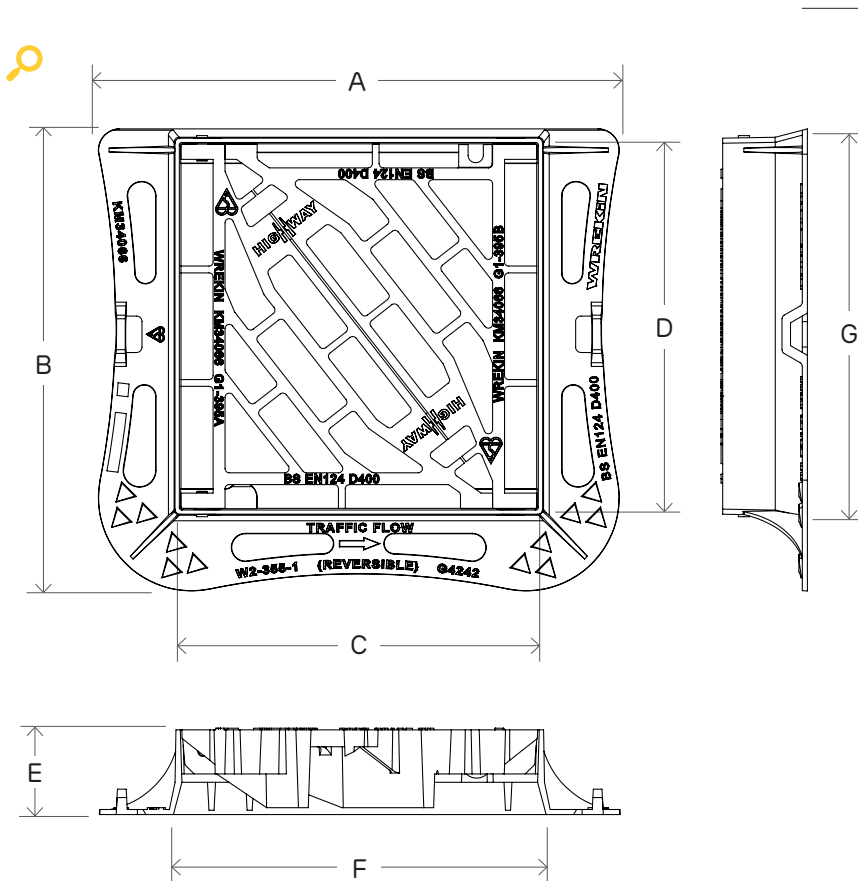


Diagram Key	
A x B	Overall Frame Size
C x D	Clear Area
F x G	Base opening
E	Frame Height

- For use in a Group 3 D400 class environment
- Fully compliant with BS EN 124
- Complies with Highways England specification HA 104/09
- Third party certified by BSI
- Three flanges - for placement against kerb edge
- Hinged product for ease of access
- Captive hinges reduce risk of theft and allow easy access for cleaning
- Enlarged frame corners help to dissipate the load
- Non rock - Three point suspension for non rock stability
- Waterway - Up to 1860cm<sup>2</sup> waterway area
- Reversible hinge - Allows correct configuration for traffic flow
- Manufactured from strong and highly durable ductile iron
- Mechanical lifting points