

## HIGHWAY™



Illustrated: DGHT0D4/6060/KH

## Highway

### D400 & HA104/09 Group-3 Gully Grates - Three Flanged

Designed and manufactured to exceed the enhanced requirements of Highways England's HA 104/09 specification. The Highway range of access covers and gully grates conforms to BS EN 124:2015 and also includes patented safety provisions and design features to ensure safe and robust performance.



Illustrated: DGHT0D4/4545/KH



Illustrated: DGHT0D4/4337/KH



Illustrated: DGHT0D4/6045/KH



Illustrated: DGHT0D4/1045/KH

#### Available options:

- Locked
- Anti-slip Coating (60+ PSRV)

1. Wrekin Products Ltd is continually seeking to improve our products and therefore reserves the right to alter product specifications without prior notice. It is the responsibility of all users to satisfy themselves the above data is current.
2. Installation details are available on request.
3. Published September 2016 - Version 1.AC




SCAN QR  
CODE FOR  
MORE INFO



| WREKIN PRODUCTS' STOCK CODE | CLEAR AREA (D x Cmm) | BASE OPENING (F x Gmm) | OVERALL FRAME (A x B mm) | FRAME DEPTH (E mm) | WATERWAY (cm²) |
|-----------------------------|----------------------|------------------------|--------------------------|--------------------|----------------|
| DGHT0D4/4545/KH             | 425 x 425            | 450 x 450              | 560 x 520                | 100                | 1200           |
| DGHT0D6/4545/KH             | 425 x 425            | 450 x 450              | 560 x 520                | 150                | 1200           |
| DGHT0D4/4337/KH             | 430 x 370            | 450 x 390              | 520 x 520                | 100                | 990            |
| DGHT0D6/4337/KH             | 430 x 370            | 450 x 390              | 520 x 520                | 150                | 990            |
| DGHT0D4/6045/KH             | 425 x 425            | 600 x 450              | 775 x 545                | 100                | 1740           |
| DGHT0D6/6045/KH             | 425 x 425            | 600 x 450              | 775 x 545                | 150                | 1740           |
| DGHT0D4/6060/KH             | 580 x 580            | 600 x 600              | 775 x 695                | 100                | 2060           |
| DGHT0D6/6060/KH             | 580 x 580            | 600 x 600              | 775 x 695                | 150                | 2060           |
| DGHT0D4/1045/KH             | 980 x 425            | 1000 x 450             | 1175 x 545               | 100                | 2810           |
| DGHT0D6/1045/KH             | 980 x 425            | 1000 x 450             | 1175 x 545               | 150                | 2810           |

### Dimensions:

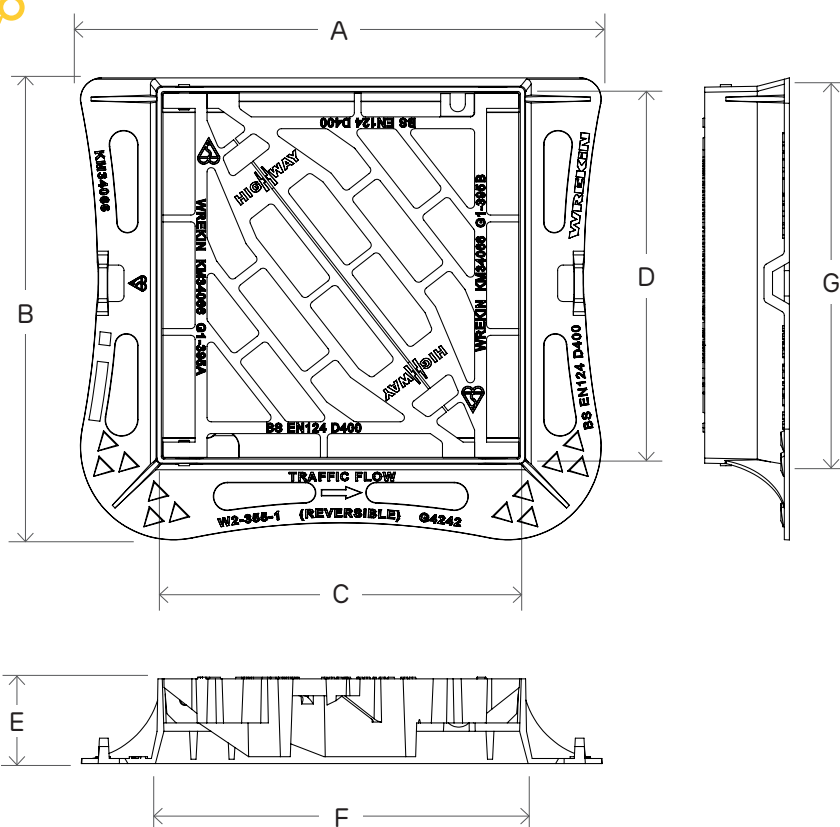

# WREKIN

Intelligent products for civil engineering

### Diagram Key

|       |                    |
|-------|--------------------|
| A x B | Overall Frame Size |
| C x D | Clear Opening      |
| F x G | Base Opening       |
| E     | Frame Height       |

-  For use in a Group 3 D400 class environment
-  Compliant with BS EN 124:2015
-  Complies with Highways England specification HA 104/09
-  Third party certified by BSI
-  Three flanges - for placement against kerb edge
-  Hinged product for ease of access
-  Captive hinges reduce risk of theft and allow easy access for cleaning
-  Enlarged frame corners help to dissipate the load
-  Non rock - Three point suspension for non rock stability
-  Waterway - Up to 2810cm<sup>2</sup>
-  Reversible hinge - Allows correct configuration for traffic flow
-  Manufactured from strong and highly durable ductile iron
-  Mechanical lifting points