

Spacer Type A heavy duty

A.HD.DBV



Height (mm)	Width (mm)	Under packaging	Commercial packaging
50	75	25	250
60	75	25	250
70	75	25	250
75	75	25	250
80	75	25	250
90	75	25	250
100	75	25	250
105	75	25	250
110	75	25	250
120	75	25	250
130	75	25	250
135	75	25	250
140	75	25	250
150	75	25	250
160	75	25	250
165	75	25	250
170	75	25	250
180	75	25	250
190	75	25	250
200	75	25	250
210	85	20	100
220	85	20	100
230	85	20	100
240	85	20	100
250	85	20	100
260	85	20	100
270	85	20	100
280	85	20	100
290	85	20	100
300	85	20	100
310	on demand		
320	90	50	50
330	on demand		
340	90	50	50
350	on demand		
360	90	50	50
370	on demand		
380	90	50	50
390	on demand		
400	90	50	50

Length: 2 m

Certificates Intersig nv



Certificates Intersig France sarl

Certificates Van Merksteijn Steel bv

For the up to date scope on our certificates, we would like to refer you to our website.



Spacer Type A heavy duty

A.HD.DBV



Dimensions

H	50 - 400	Calculated height	mm
B	75 - 90	Total width	
Ps	200	Step of the diagonals	
R	10	Bend diameter	

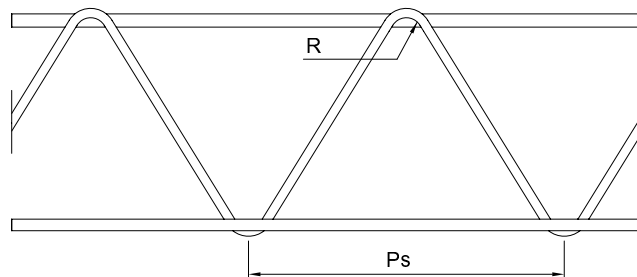

Rebar type

- Upper wire                      Grade Smooth
- Diagonal wires                Grade Smooth
- Lower wires                     Grade Smooth

Bearing power spacers for equally distributed load		
Distance in between	Bearing power	Required length / m <sup>2</sup>
1 m	120 kg/m <sup>2</sup>	1,00 Imp/m <sup>2</sup>
0,8 m	150 kg/m <sup>2</sup>	1,25 Imp/m <sup>2</sup>
0,6 m	200 kg/m <sup>2</sup>	1,70 Imp/m <sup>2</sup>
0,4 m	300 kg/m <sup>2</sup>	2,50 Imp/m <sup>2</sup>

Certificates Intersig nv



Certificates Intersig France sarl

Certificates Van Merksteijn Steel bv

For the up to date scope on our certificates, we would like to refer you to our website.