




- frame and cover are made of extrusion aluminum profile. Every cover is standardly equipped with a set of lifting keys to open the cover easily.
- suitable for tiles.
- application: outside and inside use.
- installation height 60mm.
- gas, smell and waterproof cover.
- the cover is screw tight.
- the cover is equipped with a high quality

- double round EPDM rubber and T-rubber on the side of the frame, that prevents dirt infiltration between frame and cover.
- reinforcement mesh included.
- bottom of the cover is made of 3mm aluminum plate.
- maximum load: 60 Kn with min. 4 cm concrete filling up to 600 x 600 size 40 Kn. Size from 700 x 700 up to 1000 x 1000.


### Technical data and specifications:

DC-60  
Pro-Line

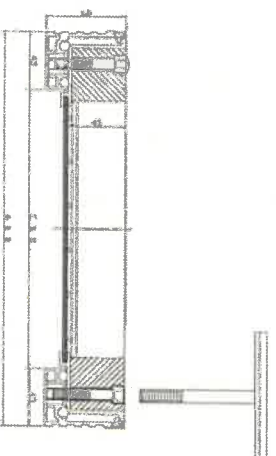

### Standard dimensions DC-60 Pro-Line

Code	Frame size A x B	Clear opening C x D	Weight
DC-60P	300 x 300mm	210 x 210mm	3,62 kg
DC-60P	400 x 400mm	310 x 310mm	5,09 kg
DC-60P	500 x 500mm	410 x 410mm	7,13 kg
DC-60P	600 x 600mm	510 x 510mm	8,82 kg
DC-60P	700 x 700mm	610 x 610mm	11,72 kg
DC-60P	800 x 800mm	710 x 710mm	14,18 kg
DC-60P	900 x 900mm	810 x 810mm	17,00 kg
DC-60P	1000 x 1000mm	910 x 910mm	20,25 kg

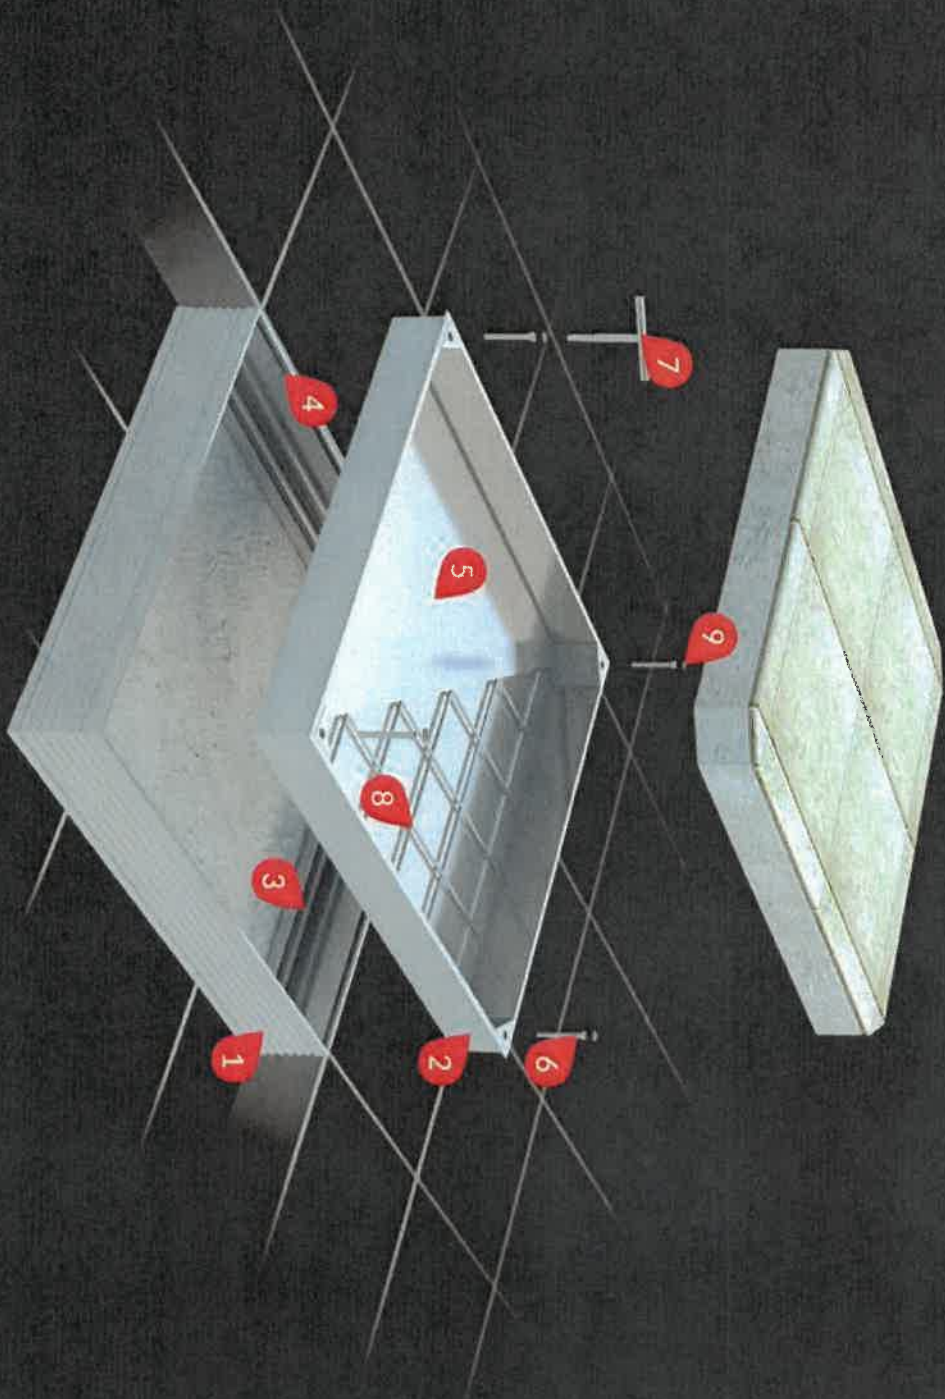

- 1 - Outside frame, 2 - Inside cover, 3 - EPDM seal 8 mm, 4 - EPDM T-rubber, 5 - Aluminium bottom plate 3 mm,
- 6 - Stainless steel screw M8 x 65 mm, 7 - Galvanized lifting keys, 8 - Galvanized iron net, 9 - Plastic cap