



## ACCESS COVERS & FRAMES

**x ZEBRA VC1**

### FOOTWAY COVER

**Class B125**  
**EN124 : 1994**  
**SG Iron 500-7**  
**ISO 1083 / EN1563**

#### DESIGN FEATURES :


- **Material(s) :**  
SG Iron 500-7  
ISO 1083 / EN1563
- **Design load :**  
125 kN to EN 124.  
Installation area :  
Group 2 - Footways, pedestrians areas and comparable areas, car parks or car parking decks, and lower groups.
- **Coating :**  
Non toxic waterbased black paint.
- **Product Certification :**  
KITEMARK

#### SPECIAL FEATURES :

- **Mass :**  
Cover : 41 Kg  
Product total : 52 kg.
- **Surface finish :**  
Anti-slip Solid Top cover.
- **Securing of cover/grating within frame :**  
Secured by locking mechanism.
- **Locking system :**  
The cover is locked by M16 CHC bolt.
- **Frame bearing pressure :**  
 $p \leq 7.5 \text{ N/mm}^2$ .
- **Frame type :**  
Rectangular monoblock as cast.  
Depth : 56 mm

#### HANDLING :

The cover is provided with 2 opening keyways to allow removal by means of a hook or pick.

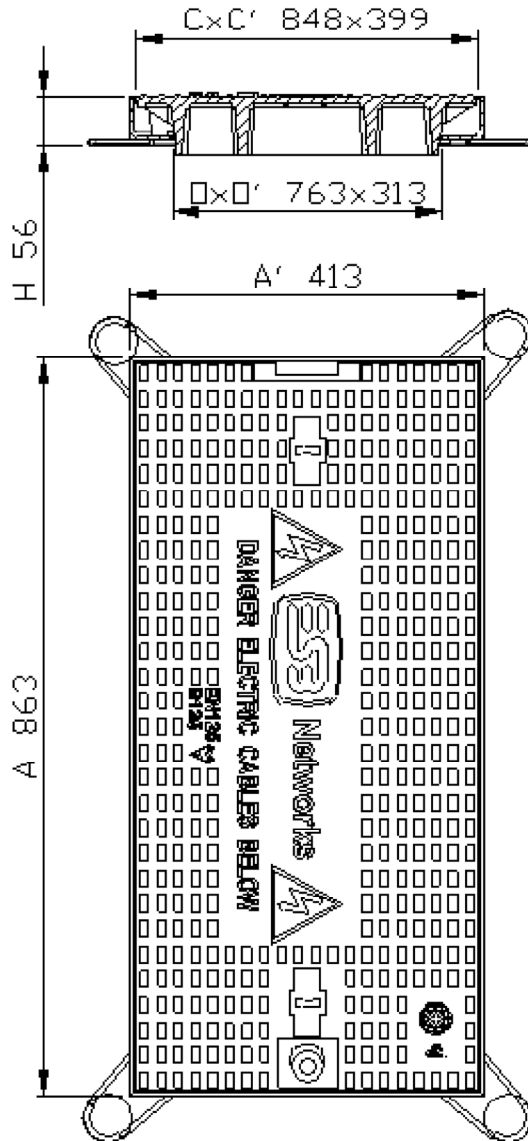

- Weights (kg), dimensions (mm), and drawings provided for your guidance.
- We reserve the right to modify specifications without prior notice.
- Uncontrolled distribution.

**CONFIDENTIAL**  
**Property of EJ EMEA**  
**Not to be used without permission.**

**EJ**  
ZI De Marivaux | Saint-Crépin Ibouvillers |  
BP50409 | 60544 Méru Cedex | France  
  
ISO 9001 - ISO 14001 - ISO 45001 - ISO 50001  
  
ejco.com

**Data sheet :**  
**NA\_716002**  
**Date updated :**  
**06.05.2021**  
**Printed : 07.05.2021**