



ACCESS COVERS & FRAMES

Class B125
EN124 : 1994

x JB4 C&F L UNBADGED KM B125 FOOTWAY COVER

SG Iron 500-7
ISO 1083 / EN1563

DESIGN FEATURES :


- **Material(s) :**
SG Iron 500-7
ISO 1083 / EN1563
Rolled steel according to ISO630.
- **Design load :**
125 kN to EN 124.
Installation area :
Group 2 - Footways, pedestrians areas and comparable areas, car parks or car parking decks, and lower groups.
- **Coating :**
Frame : Hot dip galvanised.
Non toxic waterbased black paint.
- **Product Certification :**
KITEMARK

SPECIAL FEATURES :

- **Mass :**
Cover : 42 Kg
Product total : 49 kg.
- **Surface finish :**
Anti-slip Solid Top cover.
- **Securing of cover/grating within frame :**
Secured by locking mechanism.
- **Locking system :**
The cover is locked by M16 CHC bolt.
- **Frame bearing pressure :**
 $p \leq 7.5 \text{ N/mm}^2$.
- **Cover type :**
Rectangular : 997 x 526 mm.
- **Frame type :**
Rectangular monoblock by welding.

HANDLING :

The cover is provided with 2 opening keyways to allow removal by means of a hook or pick.

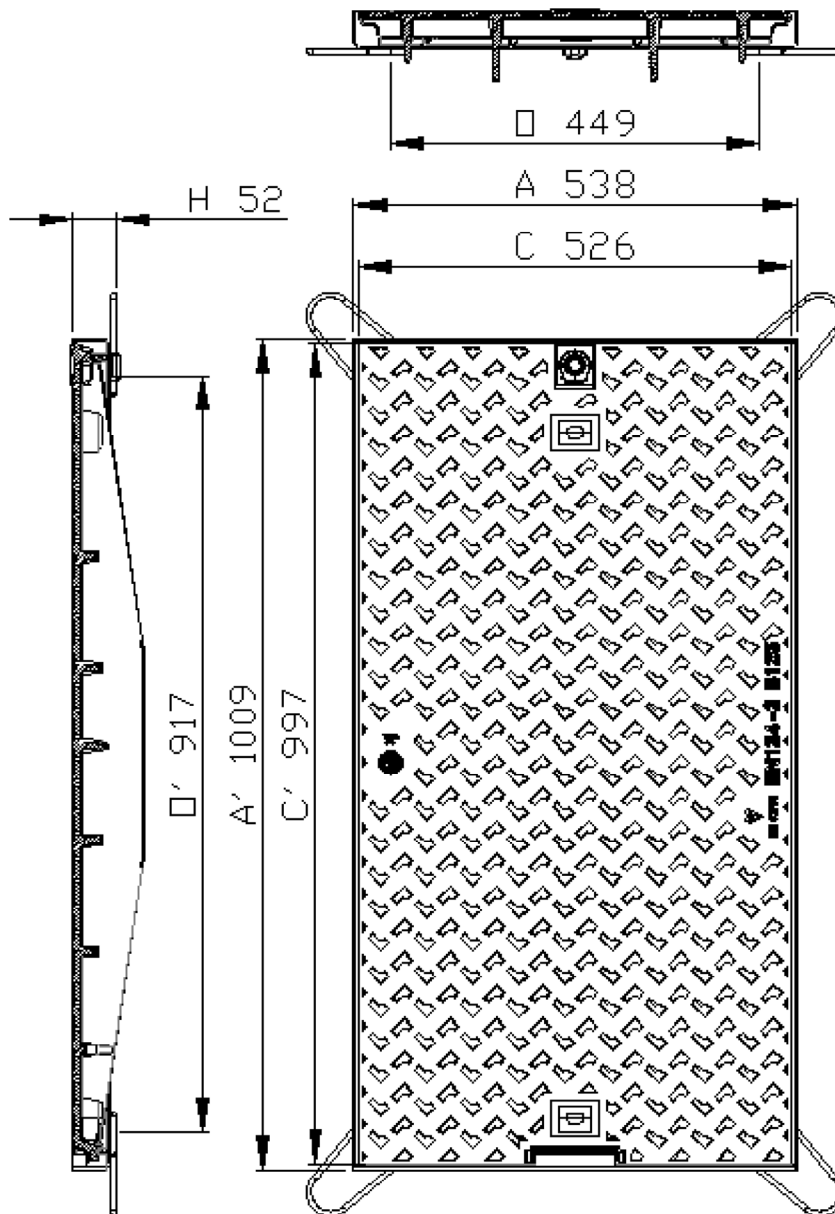

- Weights (kg), dimensions (mm), and drawings provided for your guidance.
- We reserve the right to modify specifications without prior notice.
- Uncontrolled distribution.

CONFIDENTIAL
Property of EJ EMEA
Not to be used without permission.

EJ
ZI De Marivaux | Saint-Crépin Ibouvillers |
BP50409 | 60544 Méru Cedex | France

ISO 9001 - ISO 14001 - ISO 45001 - ISO 50001

ejco.com

Data sheet :
NA_710908
Date updated :
08.06.2022
Printed : 13.06.2022